


27742R

Amplified DAB Radio Aerial User Guide

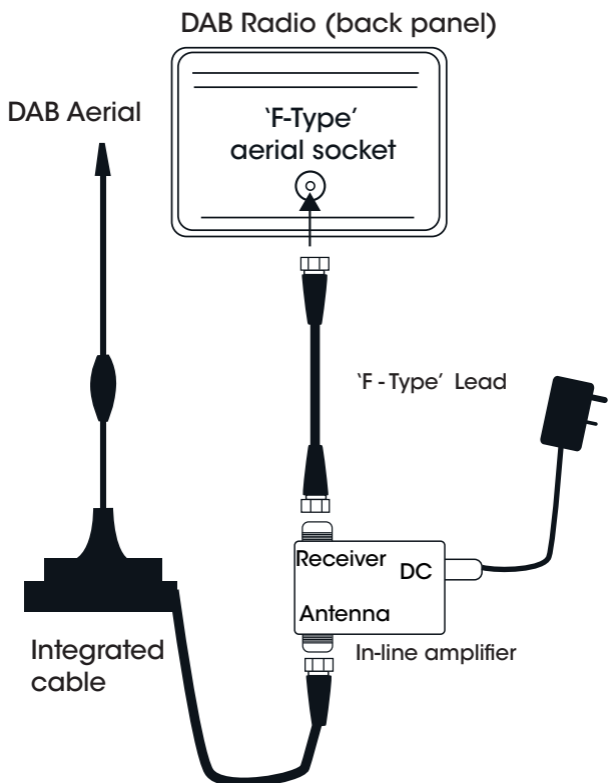

1. Remove existing aerial from DAB radio by unscrewing the 'F-Type' plug. This should loosen easily without the need for tools.
2. Connect the SLX DAB aerial to the 'antenna' socket on the in-line amplifier
3. Connect the supplied short 'F-Type' cable from the 'receiver' socket on the in-line amplifier to the antenna/aerial input on the DAB radio
4. Connect the power supply to the 'DC' input on the in-line amplifier and switch on
5. Position the aerial in a suitable position - window ledges work best.
6. Switch on your DAB radio and re-scan for stations. If you experience a 'bubble like' sound interference change the position of the aerial